


DIN 961 ISO 8676

ALTI KÖŞE BAŞLI İNCE DİŞ TAM PASO CIVATA CL:8.8 - 10.9 - 12.9

**HEXAGON HEAD BOLTS FINE THREADED UP TO HEAD
SECHSKANTSCHRAUBE MIT FEINGEWINDE BIS KOPF**

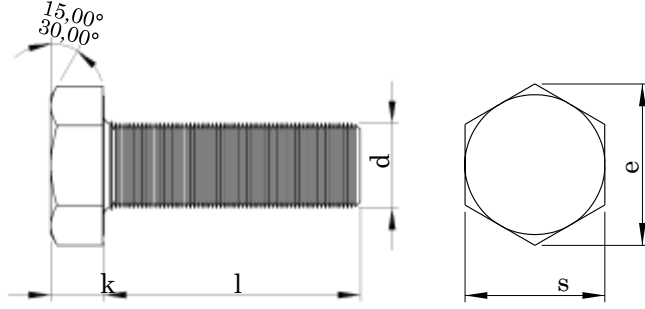

Technical Informations / Teknik Bilgiler

Thread size / Anma çapı (d)		M8	M10	M12	M14	M16	M18	M20		
Pitch / Diş adımı	P	1,00	1,00	1,25	1,50	1,25	1,50	1,50	1,50	2,00
Head height / Kafa yüksekliği k	nominal	5,30	6,40	7,50	8,80	10,00	11,50	12,50		
	min.	5,15	6,22	7,32	8,62	9,82	11,29	12,29		
	max.	5,45	6,58	7,68	8,98	10,18	11,72	12,72		
Head width / Anahtar ağızı s	min.	12,73	15,73	17,73	20,67	23,67	26,67	29,67		
	max.	13,00	17,00	19,00	22,00	24,00	27,00	30,00		
Diagonal / Köşegen e	min.	14,38	18,90	21,10	24,49	26,75	30,14	33,53		

Thread size / Anma çapı (d)		M8	M10	M12	M14	M16	M18	M20	
Length / Boy (l)	min.								
	max.								
		Weight / Ağırlık gr/p							
20	19,58	20,42	12,40	23,50	32,90	48,70	64,50	90,00	118,00
25	24,58	25,42	14,10	26,20	36,60	54,00	71,50	98,50	128,00
30	29,58	30,42	15,70	28,90	40,30	59,10	78,50	107,00	139,00
35	34,50	35,50	17,40	31,60	44,00	64,40	85,30	116,00	151,00
40	39,50	40,50	19,10	34,30	47,70	69,60	92,30	124,00	162,00
45	44,50	45,50	20,70	36,90	51,40	74,90	99,00	133,00	172,00
50	49,50	50,50	22,30	39,60	55,00	80,20	106,00	142,00	184,00
55	54,40	55,60	24,00	42,30	58,70	85,40	113,00	151,00	195,00
60	59,40	60,60	25,70	45,10	62,40	90,60	120,00	160,00	207,00
70	69,40	70,60	29,00	50,50	70,00	101,00	134,00	177,00	228,00
80	79,40	80,60	32,30	55,80	77,40	111,00	148,00	195,00	251,00
90	89,30	90,70	35,70	61,20	84,80	122,00	162,00	212,00	272,00
100	99,30	100,70	38,90	66,70	92,20	133,00	176,00	229,00	295,00
110	109,30	110,70	42,40	72,20	99,20	144,00	190,00	247,00	317,00
120	119,30	120,70	45,90	77,50	107,00	154,00	204,00	265,00	339,00
130	129,20	130,80		79,90	114,00	165,00	218,00	283,00	361,00
140	139,20	140,80		88,30	121,00	175,00	232,00	300,00	383,00
150	149,20	150,80		93,60	128,00	186,00	245,00	318,00	405,00

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.