
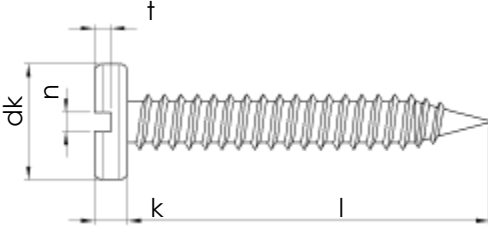


DIN 7971 ISO 1481
**SİLİNDİR BAŞLI SAC VİDASI (SB) SLOTTED PAN HEAD
 TAPPING SCREWS ZYLINDER-BLECHSCHRAUBEN MIT
 SCHLITZ**

Technical Informations / Teknik Bilgiler

Thread size / Anma çapı (d)			2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
Head dia / Kafa çapı	dk	min.	4,20	5,60	6,90	7,50	8,20	9,50	10,80	12,50
		max.	3,90	5,30	6,54	7,14	7,84	9,14	10,37	12,07
Head height / Kafa yüksekliği	k	min.	1,15	1,50	1,85	2,00	2,15	2,50	2,85	3,30
		max.	1,35	1,75	2,10	2,25	2,45	2,80	3,20	3,65
Socket width / Yarıklık Genişliği	n	nominal size	0,60	0,80	1,00	1,00	1,20	1,20	1,60	1,60
		min.	0,66	0,66	1,06	1,06	1,26	1,26	1,66	1,66
Socket depth / Yarıklık min. Derinliği	t	max.	0,80	1,00	1,20	1,06	1,51	1,51	1,91	1,91
		min.	0,55	0,75	0,95	1,05	1,15	1,35	1,55	1,8
		max.	0,80	1,00	1,25	1,40	1,50	1,70	1,95	2,20

Thread size / Anma çapı (d)			2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
Length / Boy		min.								
		max.								
			Weight / Ağırlık gr/p							
4.5	3,70	5,30	0,17							
6.5	5,70	7,30	0,21	0,42						
9.5	8,70	10,30	0,27	0,53	0,84	1,07	1,26	1,85		
13	12,20	13,80	0,34	0,66	1,02	1,29	1,50	2,18	3,24	4,32
16	15,20	16,80	0,40	0,77	1,17	1,48	1,71	2,46	3,82	4,86
19	18,20	19,80		0,87	1,32	1,67	1,92	2,74	4,00	5,40
22	21,20	22,80			1,47	1,86	2,13	3,02	4,38	5,94
25	24,20	25,80			1,62	2,05	2,34	3,30	4,76	6,48
32	30,70	33,30					2,83	3,96	5,67	7,74
38	36,70	39,30						4,52	6,45	8,82

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.